


619 Miniature cartridge Fuse

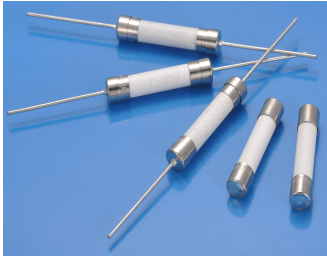

Main Characteristics

Miniature cartridge fuse; Fast-Acting(F)

Standard

UL 248-14

Materials

Tube: Ceramic Tube
End Caps: Nickel plated brass
Axial Leads: Nickel plated caps
Tin plated copper wires

Operating Temperature

-55°C to +125°C

Storage Conditions

+10°C to +60°C
Relative humidity: ≤75% yearly average
Without dew, maximum 30 days at 95%


Vibration Resistance

120 cycles in 1 direction at 1 min. each
10-55Hz, 3 directions(X, Y, Z) in total
According to MIL-STD-202 Method 201A


Soldering Parameters

260°C. ≤5 sec (Wave Soldering)
350°C. ≤3 sec (Hand Soldering)
Soldering Peak:
260°C. 10 sec. (IEC 60068-20)

Average Time Current(I-T Curve)

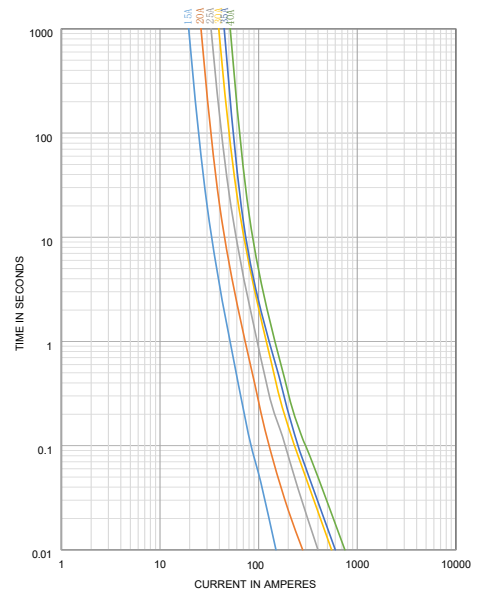

Dimensions (unit: mm)



★ 15.0A~30A: $\phi 1.0$ mm
>30A: $\phi 1.2$ mm



Electrical Characteristics at 25°C							
Amp Code	Rated Current	Rated voltage	Typical Cold Resistance (mΩ)	Nominal Melting I ² t(A ² sec)	Breaking Capacity	Approvals	
						cURus	TUV
2150	15.00A	150V DC 660V AC 500V AC	6.28	182.3	200A@150VDC 400A@660V AC 800A@500V AC	●	○
2200	20.00A		4.32	672		●	●
2250	25.00A		3.02	2425		●	○
2300	30.00A		2.31	4185		●	●
2350	35.00A		2.05	5023		●	●
2400	40.00A		1.78	5500		●	○

Note: The current values used for calculating I²T should be at 10In.

Ordering Information

Series	Amp Code	Supplementary Code	Qty
619			